



MULTIPLEX 2

INDUSTRIAL LAUNDRY DISPENSING SYSTEM

PRODUCT DATASHEET



Description

Designed to cater to a range of laundry sizes, the Multiplex range serves establishments operating anywhere from 4 to 12 washing machines. With safety as a top priority, the Multiplex dispensing system incorporates several key features to ensure peace of mind for operators. From rigorous leak and water testing protocols to comprehensive chemical compatibility checks, Multiplex guarantees a secure dispensing routine. Additionally, its innovative design includes continuous channel cleaning with water, effectively minimizing maintenance requirements and ensuring uninterrupted operation.

Technical Specifications


	Value		
UNIT	Maximum of products	8	
	Maximum number of washing machines*	10	
	* Requires Machine Hold functionality		
INTERACTION	Functions	Configure Real-Time View Reports Password Management	
	Interface	7" touchscreen (local) Web server (Local) Web Portal	
	ELECTRICAL PARAMETERS	Voltage / Frequency	110-240 VAC / 50-60Hz
		Power	120W

Technical Specifications

		Value
WATER	Pressure in dynamic range	Min 22 PSI - Max 44 PSI Regulator recommended
	Flow rate range	Min 68 fl oz/min (Approx) Max 338 fl oz/min (Approx)
	Inlet connection	3/8" barbed connector
	Maximum temperature	< 86° F
	Required hardness	8 - 8.5 gpg (grains per gallon)
	Booster tank	Not included. Supplied on request. Recommended.
PANELS	Material	PVC
PUMPS	Number	1 pump per channel. Main channel: electric diaphragm
	Flow rate (with water)	51 fl oz per minute
	Body	PVDF
	Membranes	PTFE
	Check valves	PVDF/FFKM
PRODUCT/WATER VALVES	Voltage	24VDC
	Body	PP
	Closure piston	PTFE
	O-rings	FFKM
FLOW METERS	Standard measuring principle	Paddles + Hall effect sensor
	Signal	24 VDC PNP
	Body	PP
	Paddles	PVDF
	O-rings	FKM
	Alternative	*Oval Gear not included. Supplied on request. Recommended with chemicals 180cP or higher.
DOSING	Distribution	External distributor
	Outlet barb diameter	3/8"
	Outlet barb material	PVDF
	Fittings (straight / elbows)	PP for 3/8" / 1/2" pipe
	Built-in tubes	PTFE (Teflon) 3/8" x 1/2" pipe
	Recommended pipes for installation	Reinforced PVC 3/8" x 5/8"
CALIBRATION	Mode	Distributor Valve
	Measuring vase	Not included * recommend
FORMULAS	Number	200
	Dose units	g/kg fl oz/cw
	Maximum number of doses per phase	6

		Value
STATISTICS	Data	Cloud synchronization
		Onboard storage
		Production in load and cycles
	Information	Consumption and product cost
		OEE
REMOTE ACCESS	Availability	Alarms
		Data always available on the web portal and the possibility to make changes at any time, with instant synchronization
	Router *Internet access	Not included in the equipment

Diagram

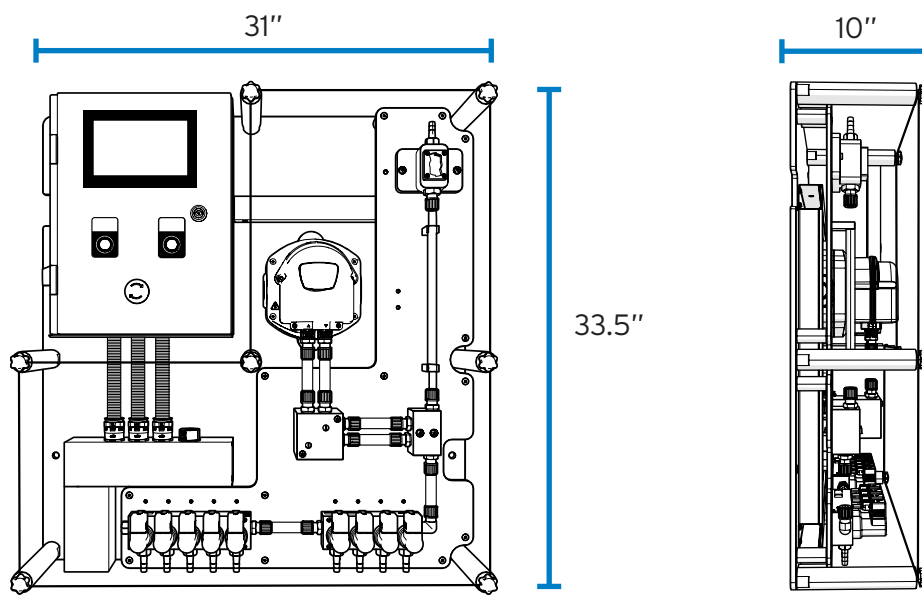

Dimensions

Width	31 inches
Height	33.5 inches
Depth	10 inches

Weight


Unit	76 lbs
------	--------

T (+1) 913-956-4909 E sales@brightwell-inc.com W brightwell-inc.com/

Brightwell Dispensers Inc. 9858 Britton Street, Lenexa, KS, 66219

All information in this data sheet is correct at the time of printing and is subject to change without notice.

Example of Recommended Setup

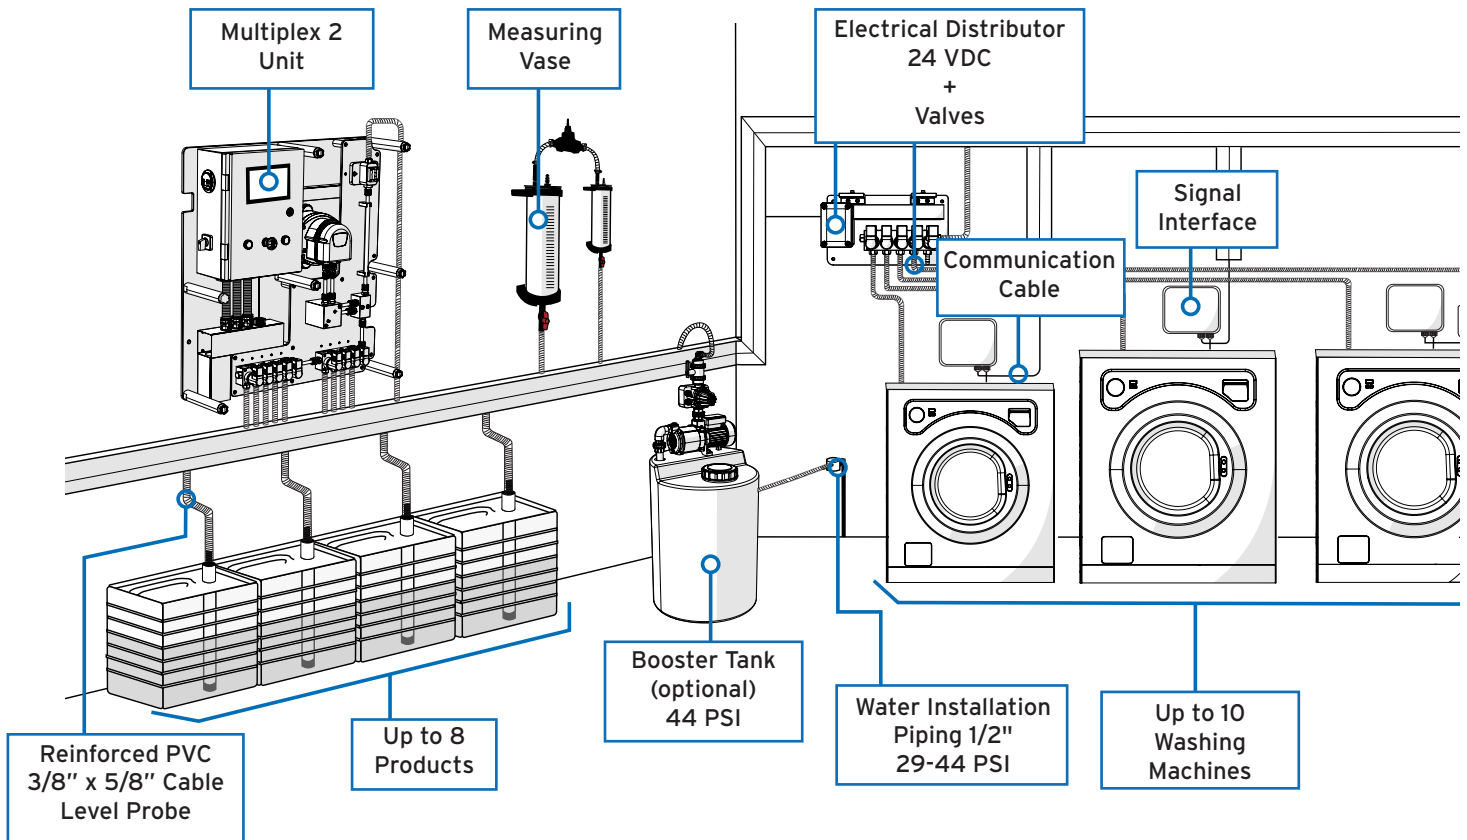

T +44 (0) 1273 513566 **E** sales@brightwell.co.uk **W** brightwell.co.uk

Unit 1, Rich Industrial Estate, Avis Way, Newhaven, East Sussex, BN9 0DU, UK

All information in this data sheet is correct at the time of printing and is subject to change without notice.