BRIGHTWELL



MULTIPLEX DISTRIBUTOR (ELECTRICAL)

MULTIPLEX ACCESSORY



Technical Specifications

	Value
MATERIAL	Material: PP (Polypropylene) Connector: 3/8"
BARBS	Material: PVDF Connector: 3/8" - Tubing 10mm
CONFIGURATIONS	4+1 - 11+1
VALVE TYPE	Electric solenoid valves
VOLTAGE	24 VDC
CLOSURE PISTON	PTFE
RECOMMENDED WIRING	0.5 mm cross-section multi- stranded cable

Description

Optimise your industrial laundry system with our advanced External Laundry Dispensing Unit, designed to connect multiple washers to our dispensing unit. With configurations from 3+1 to 10+1 channels, this high-performance unit offers versatility and efficiency.

Key Features:

Electric Solenoid Valves: Ensure precise and reliable control with these valves, optimising chemical distribution.

Simple Integration: Easily connects to our industrial laundry units, improving operational efficiency.


Total Compatibility: Designed to work in harmony with our dispensing unit, ensuring efficient dispensing.


Robust Construction: Durability guaranteed to withstand the demands of industrial environments, minimising maintenance.

Details

Part Code	Description	Width	Height	Depth
A500D1W03	MULTIPLEX ELECTRIC DISTRIBUTOR -W3 V4	550 mm	300 mm	149 mm
A500D1W04	MULTIPLEX ELECTRIC DISTRIBUTOR -W4 V5	550 mm	300 mm	149 mm
A500D1W05	MULTIPLEX ELECTRIC DISTRIBUTOR -W5 V6	625 mm	300 mm	149 mm
A500D1W06	MULTIPLEX ELECTRIC DISTRIBUTOR -W6 V7	625 mm	300 mm	149 mm
A500D1W07	MULTIPLEX ELECTRIC DISTRIBUTOR -W7 V8	865 mm	300 mm	149 mm
A500D1W08	MULTIPLEX ELECTRIC DISTRIBUTOR -W8 V9	865 mm	300 mm	149 mm
A500D1W10	MULTIPLEX ELECTRIC DISTRIBUTOR -W10 V11	975 mm	300 mm	149 mm

Diagram

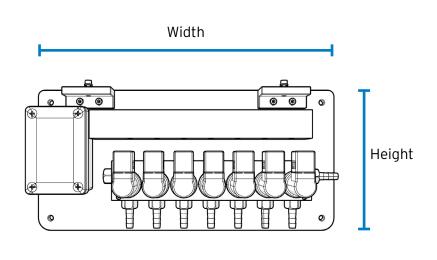



Dimensions (mm)

	Width	Height	Depth		
4+1 / 5+1	390	225	149		
6+1 / 7+1	475	225	149		
8+1 / 9+1	700	225	149		
10 + 1 / 11 + 1	780	225	149		

Weight

4+1 / 5+1	4 kg (approx)
6+1 / 7+1	6 kg (approx)
8+1 / 9+1	7 kg (approx)
110 + 1 / 11 + 1	9 kg (approx)

Diagram

